



P8P67 WS REVOLUTION updates BIOS from 1503(or below) to 2105(or above) for support Ivy Bridge CPU, the BIOS update SOP are as following:

➤ Use EZ Flash 2:


Step 1: Enter BIOS → Press “Esc” → Select “Advanced Mode”

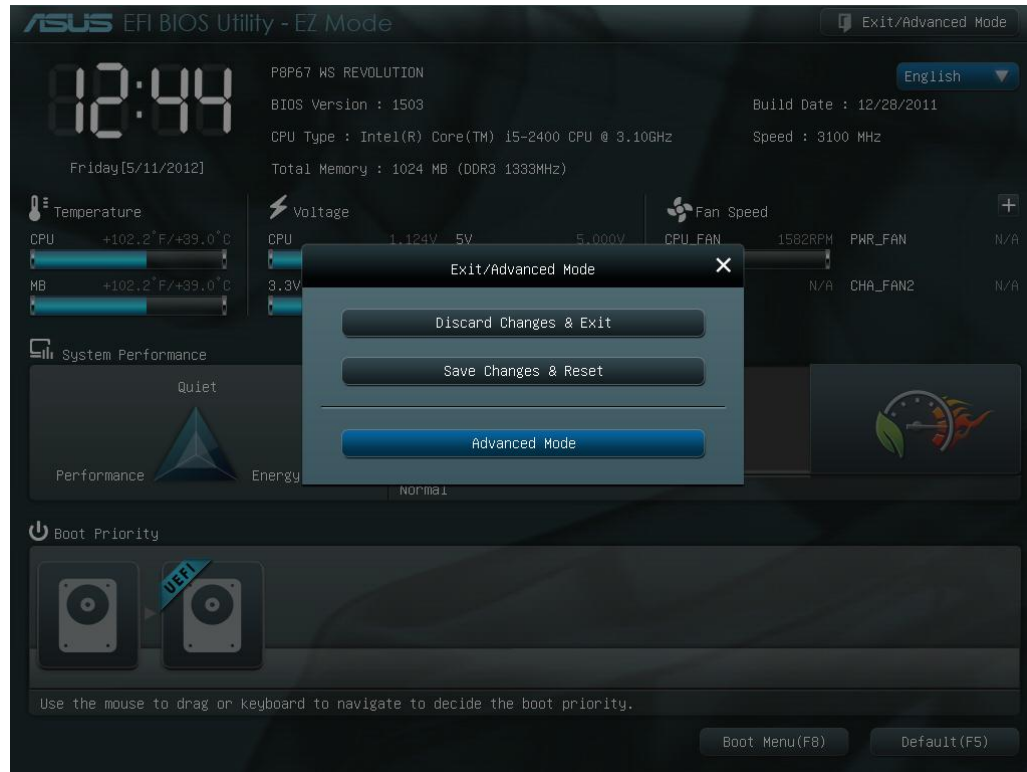


Step 2: Select “Tool” → Select “ASUS EZ Flash 2 Utility”

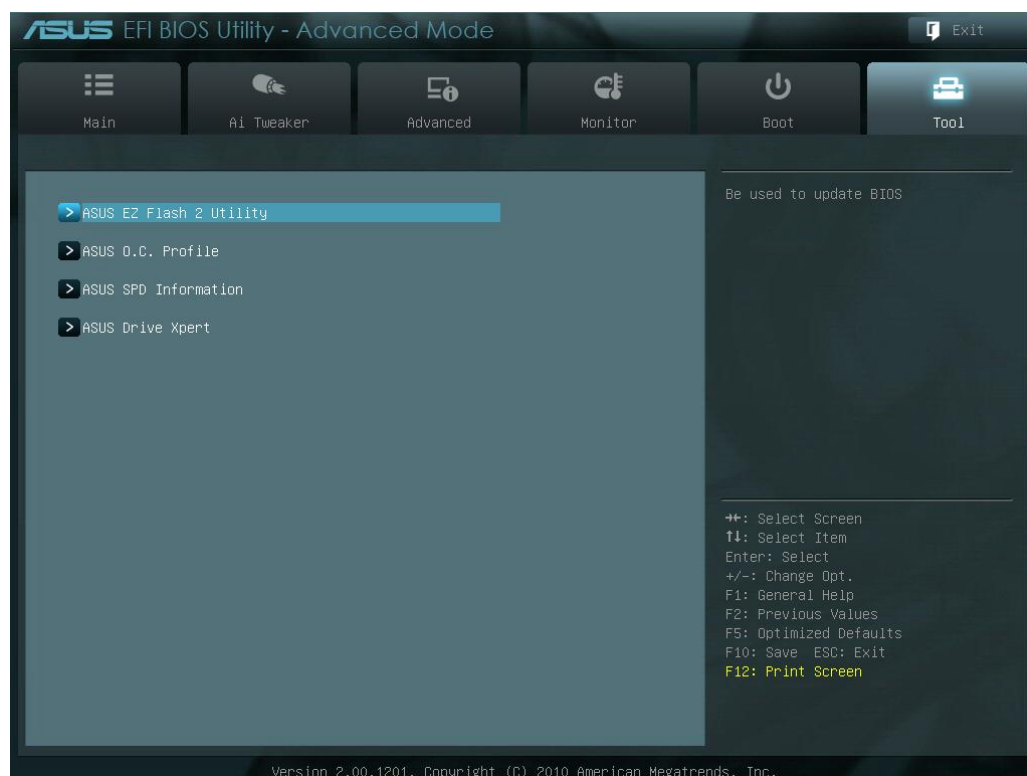


Step 3: Select the 2105 BIOS ROM file (“P8P67-WS-REVOLUTION-ASUS-2105.ROM”) from your flash disk→ Press “OK” to read file.

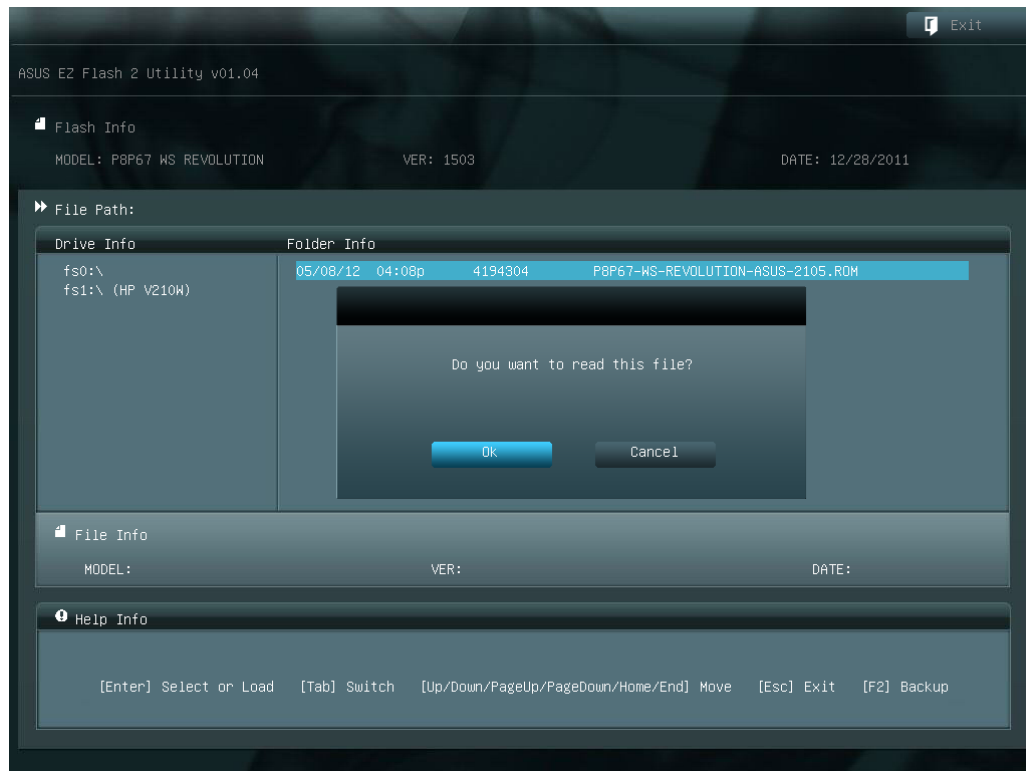


Step 4: Updated BIOS successfully → Press “OK” to reset system.

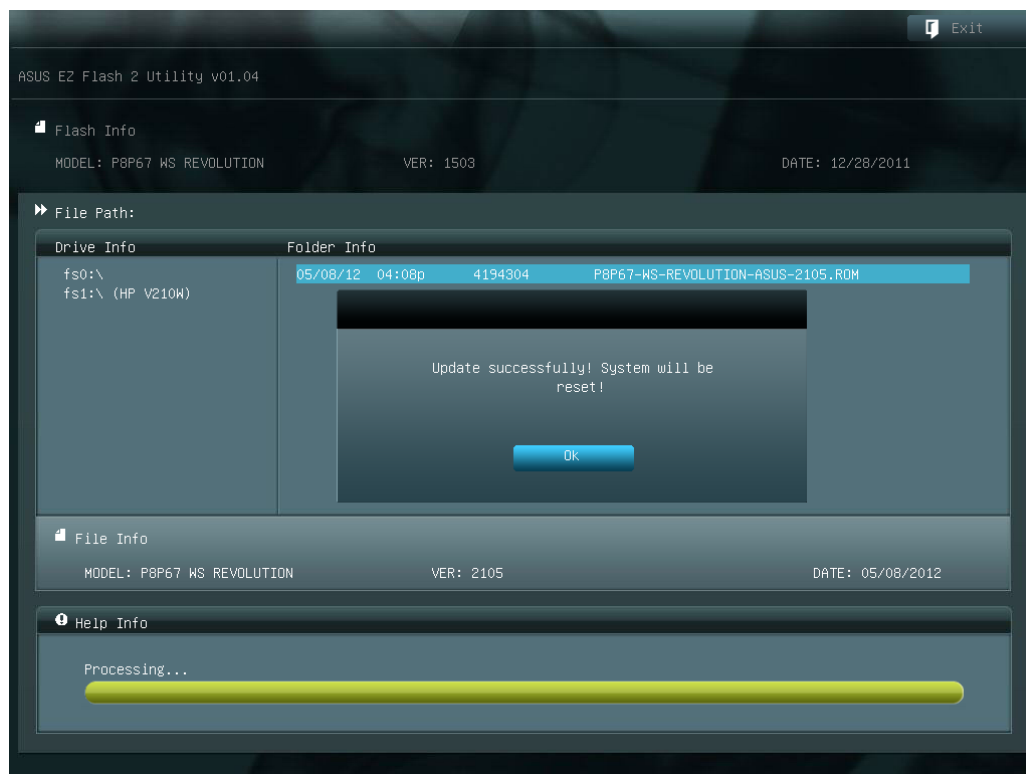


Step 5: Press "OK"

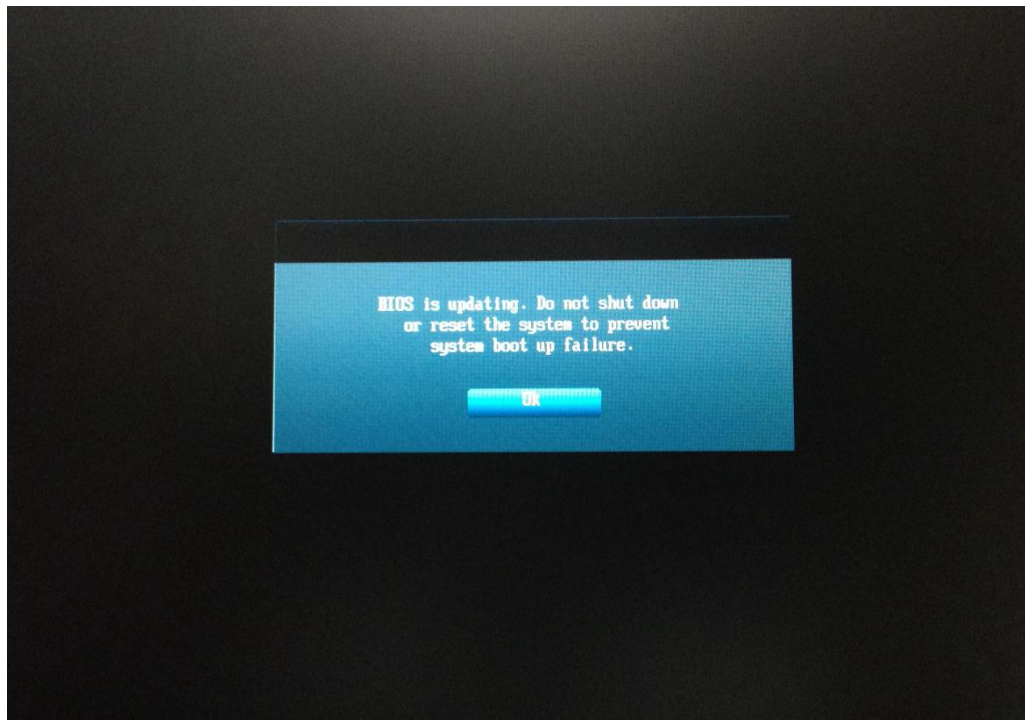


Step 6: Updating BIOS.

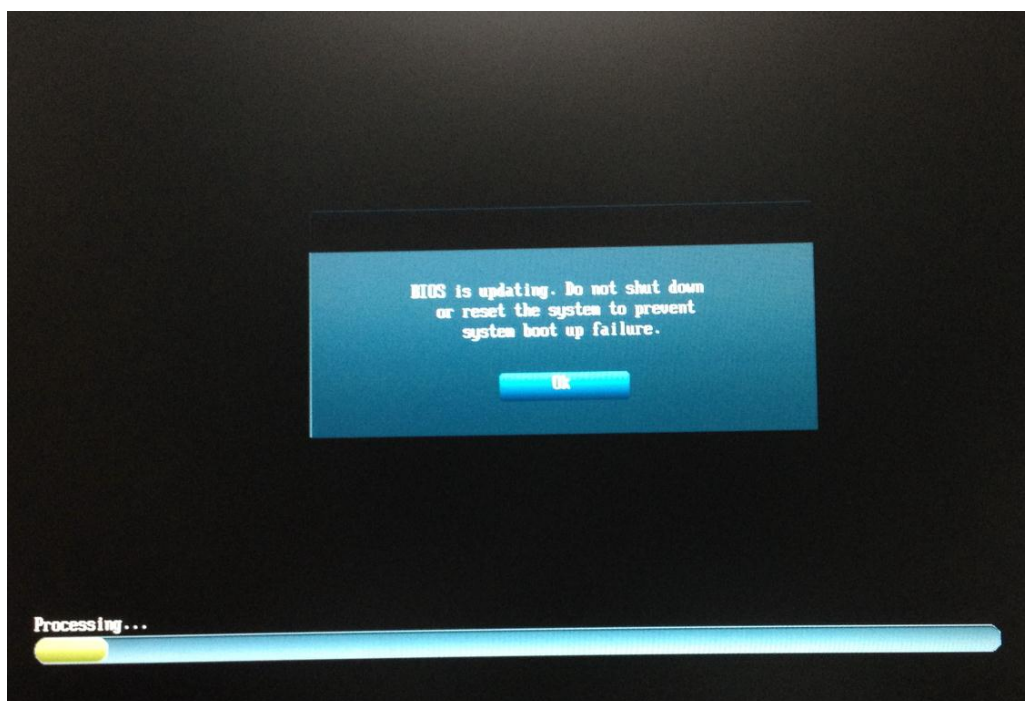

Step 7: BIOS update successfully, press “OK” to reset system again.

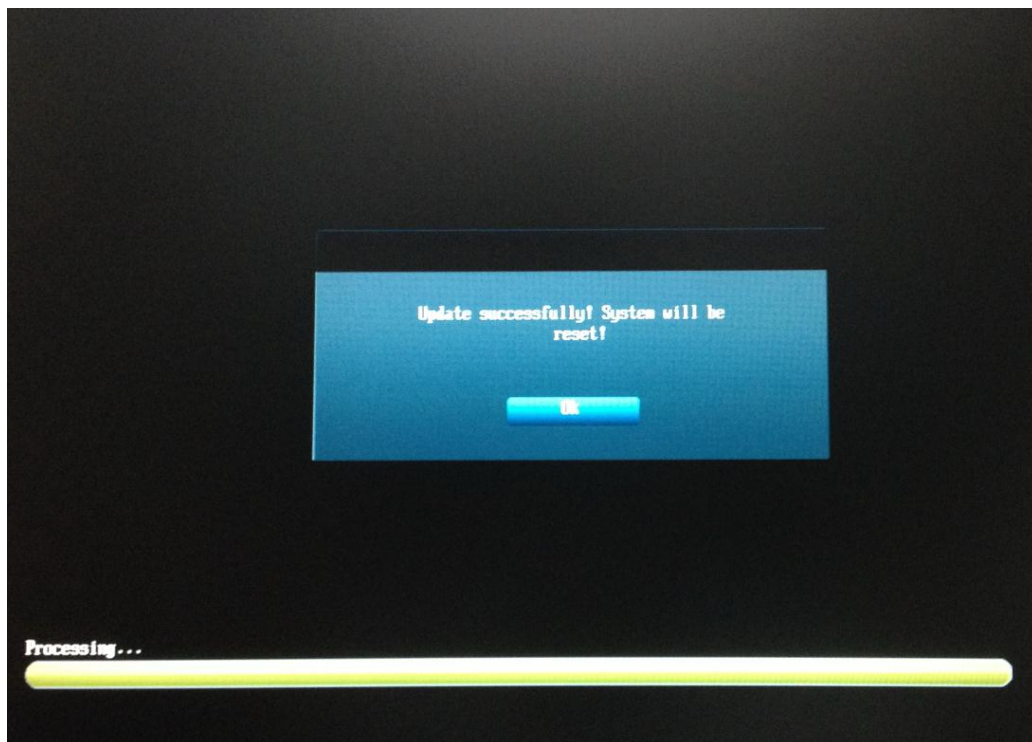

Step 8: Enter BIOS (Advanced Mode) and confirm ME version show 8.0.2.1410.

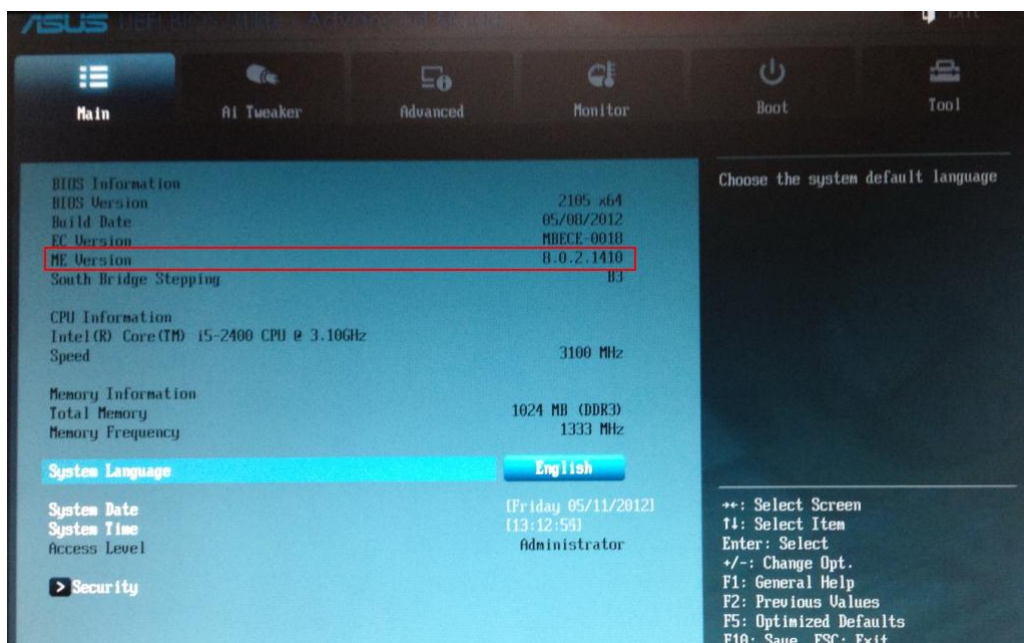



➤ Use Bupdater utility:

Step 1: Use bootable flash disk to enter DOS → use “bupdater /i**2105.rom**” command to update 2105 BIOS. (Please download bupdater.exe and P8P67 WS REVOLUTION 2105 ROM files from ASUS official website)

```
Microsoft(R) Windows 98
(C)Copyright Microsoft Corp 1981-1999.


C:\>dir/w

Volume in drive C has no label
Volume Serial Number is C458-9882
Directory of C:\

BUPDATER.EXE      2105.ROM
                2 file(s)      4,262,526 bytes
                0 dir(s)      1,004,212,224 bytes free

C:\>bupdater /i2105.rom_
```


Step 2: Updating BIOS.

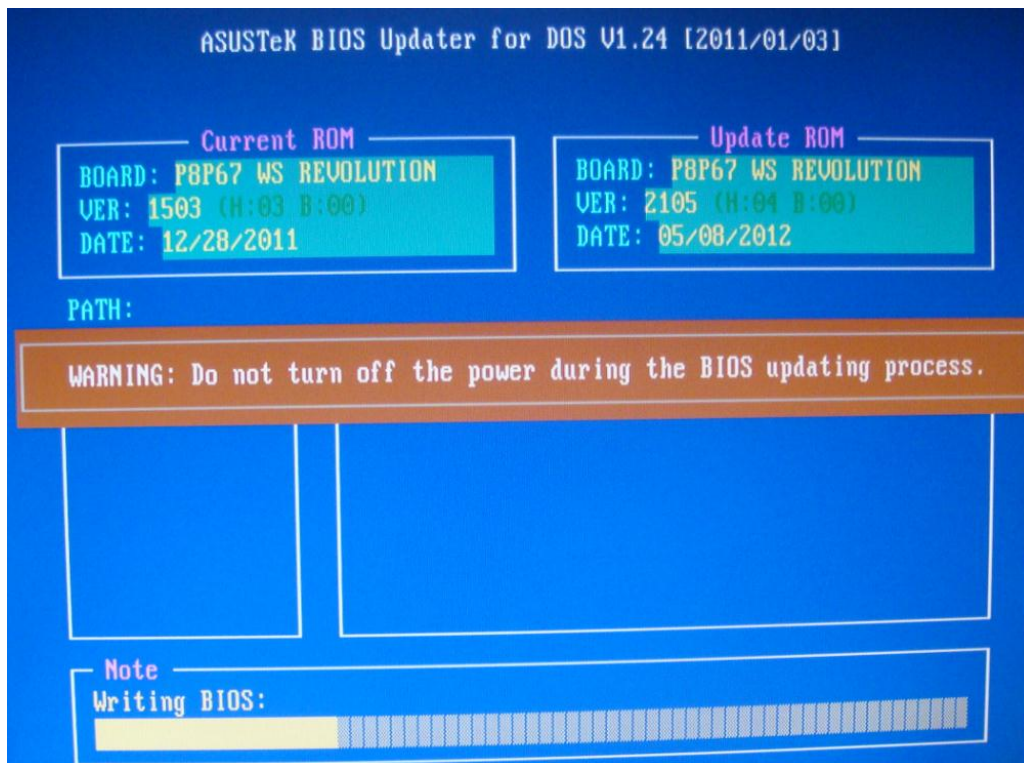

Step 3: Restart system.

```
The BIOS update is finished. Please restart your system.  
C:\>_
```

Step 4: Press "F1" to enter DOS.

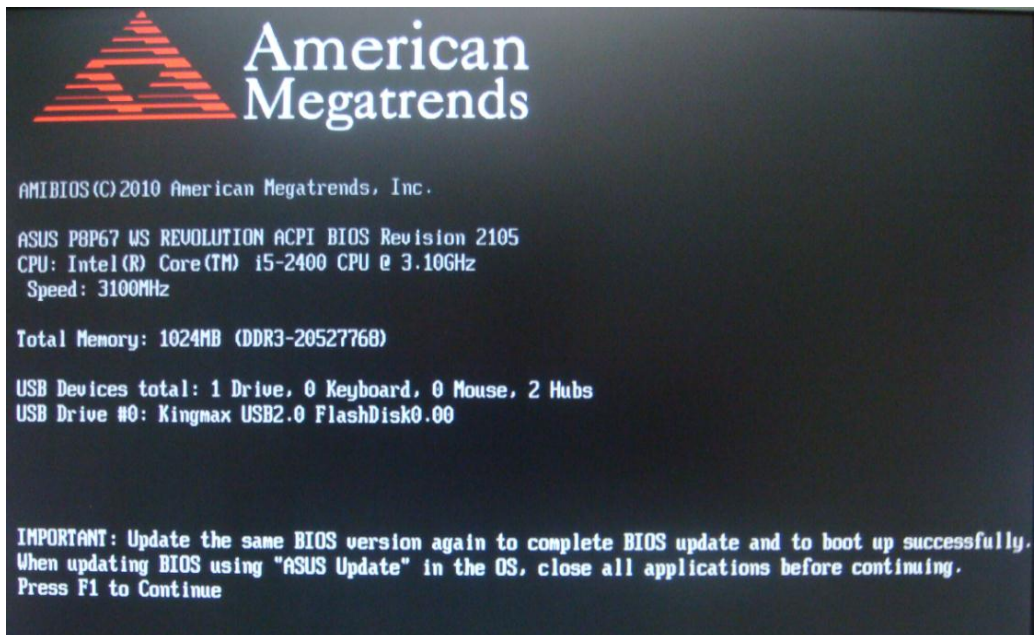

American Megatrends

AMIBIOS (C) 2010 American Megatrends, Inc.

ASUS P8P67 WS REVOLUTION ACPI BIOS Revision 2105  
CPU: Intel(R) Core(TM) i5-2400 CPU @ 3.10GHz  
Speed: 3100MHz

Total Memory: 1024MB (DDR3-20527768)

USB Devices total: 1 Drive, 0 Keyboard, 0 Mouse, 2 Hubs  
USB Drive #0: Kingmax USB2.0 FlashDisk0.00


IMPORTANT: Update the same BIOS version again to complete BIOS update and to boot up successfully.  
When updating BIOS using "ASUS Update" in the OS, close all applications before continuing.  
Press F1 to Continue

Step 5: Use "bupdater /i2105.rom" command to update 2105 BIOS again.


```
Microsoft(R) Windows 98  
(C)Copyright Microsoft Corp 1981-1999.  
C:\>dir/w  
  
Volume in drive C has no label  
Volume Serial Number is C458-9882  
Directory of C:\  
  
BUPDATER.EXE    2105.ROM  
                2 file(s)      4,262,526 bytes  
                0 dir(s)    1,004,212,224 bytes free  
  
C:\>bupdater /i2105.rom_
```



Step 6: Updating BIOS.

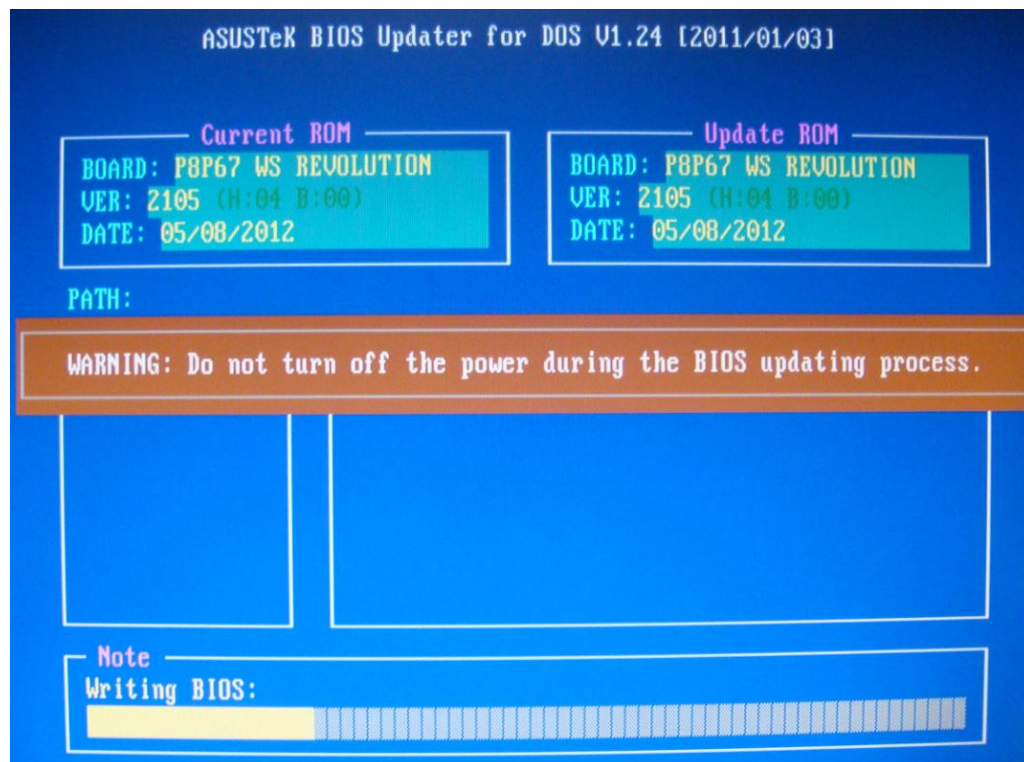

Step 7: Restart system.

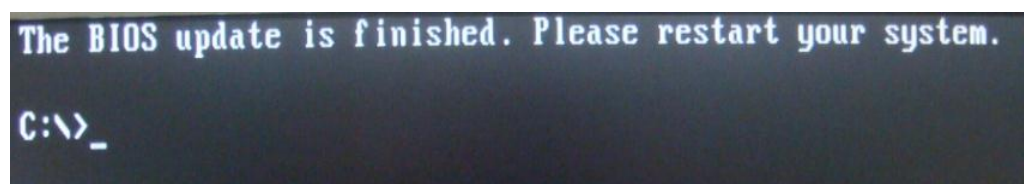

Step 8: Enter BIOS (Advanced Mode) and confirm ME version show 8.0.2.1410.

